



HPI-25VTC-02FR – FIRE RETARDANT


Hendrix Vise Top pin insulators incorporate a clamping mechanism in the insulator to provide quick and easy conductor installation without the need for additional tie products. When used with the VTST-1 Stringing Tool, conductors can be installed without separate stringing blocks, significantly reducing installation costs.

The HPI-25VTC-02FR is a self-extinguishing fire retardant design with composite clamping inserts suitable for use with all bare and covered conductors. The composite is chemically inert and does not deteriorate by weather/UV or contamination. It also offers consistent and repetitive gripping across all conductor types. The HPI-25VTC-02FR has a standard ANSI 1 3/8" thread size and is a direct replacement for medium-voltage pin insulators.

- Exceeds ANSI electrical and mechanical requirements
- Breakaway bolt rings ensure proper conductor clamping
- Resistant to impact damage, breakage and vandalism
- Made from UV stabilized polyethylene
- Fire retardant – Meets UL-94 V0
- Offers SKU reduction
- Made in USA

PRODUCT DATA

Characteristic	ANSI C29.5 Class 56-1	HPI-25VTC-02FR
DIMENSIONS		
Leakage distance (in)	13	15.7
Dry-arc distance (in)	7	9.3
^[1] Pin-hole diameter (in)	1-3/8	1-3/8
MECHANICAL VALUES		
^[2] Cantilever strength (lbs)	2500	>3000
ELECTRICAL VALUES		
Typical application (kV)		25
Flashover voltage, 60 Hz Dry (kV)	95	97
Flashover voltage, 60 Hz Wet (kV)	60	53
Impulse Flashover – Positive (kV)	150	153
Impulse Flashover – Negative (kV)	190	190
Low frequency Puncture (kV)	130	220
OTHER		
Max. Conductor Diameter (in)		1.75
Part Weight (lbs)		2.6
Max Continuous Conductor Temp (°C)		120

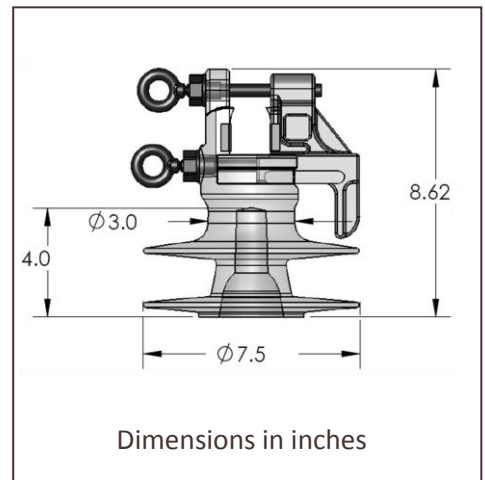

Notes: [1] Other pin-hole diameters and thread configurations are available
 [2] Cantilever strength refers to side neck loading