



HPI-LP-14FA

Hendrix Line Post Insulators are molded from a proprietary blend of gray, track and UV resistant, high density polyethylene. They are more durable and reliable than traditional porcelain insulators. They are also lighter, safer and easier to handle.


The HPI-LP-14FA is the lightest weight insulator in its category. It is a composite tie-top design with a standard ANSI “F” neck, aluminum base and center tapped $\frac{3}{4}$ ” mounting thread size. It meets the electrical and mechanical requirements of ANSI C29.18 Class 51-4F. It is a direct replacement for high-voltage porcelain or composite insulators.



- Easy handling – Lighter than porcelain and composite designs
- Designed for use with all Tie Products
- Resistant to impact damage, breakage and vandalism
- Manufactured in USA

PRODUCT DATA

Characteristic	ANSI C29.7 57-3	ANSI C29.18 51-4F	HPI-LP-14FA
DIMENSIONS			
Neck Designation	F	F	F
Leakage Distance (in)	29	29	32.6
Dry-arc Distance (in)	12.25	12.25	13.1
Center-hole Diameter (in)	0.75	0.75	0.75
MECHANICAL VALUES			
Specified Cantilever Load (lbs)	2800	2240	2400
Maximum Design Cantilever Load (lbs)	1120 ^[1]	1235 ^[2]	1250
Specified Tensile Load (lbs)	N/A	2000	>3000
ELECTRICAL VALUES			
Typical system application (kV)	25/35	25/35	25/35
Flashover, 60 Hz Dry (kV)	125	125	127
Flashover, 60 Hz Wet (kV)	95	95	96
Impulse Flashover – Positive (kV)	200	200	221
Impulse Flashover – Negative (kV)			-365
OTHER			
Max. Conductor Diameter (in)	1-15/16	1-15/16	1.75
Part Weight (lbs)	>24	>12	6.8
Max. Continuous Conductor Temp (°C)			120

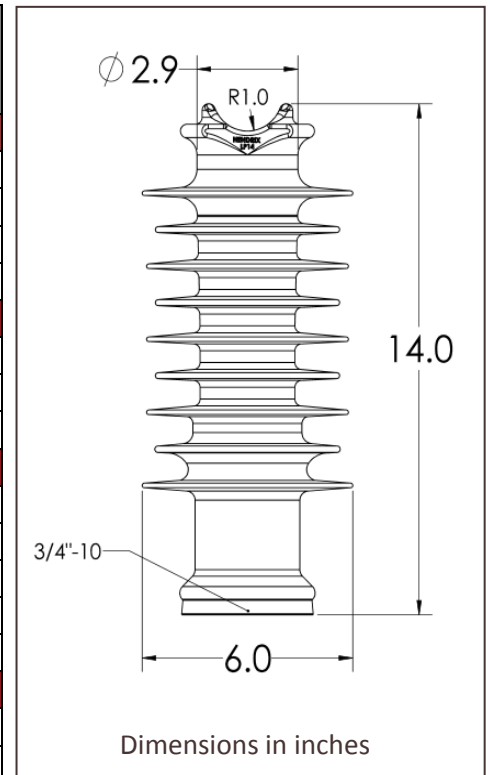

NOTES: [1] Wet-process porcelain insulators are proof tested at 40% of Rated Cantilever Strength
 [2] MDCL for non-ceramic is specified by the manufacturer, typically 1235 to 1350 lbs (5.5 or 6 kN)
 [3] US Patent Applied For, Application No. 14/936,147