


Kerite Cable Services Project Profile

Project	Berks Substation 138k Installation
Client	Matrix NAC / PPL
Location	Reading, PA
Cable Design	138 kV, 2000 kcmil Cu
Length	3,000ft
Subcontractor(s)	Central Connecticut Cable Co., Inc.
Scope	Installation of two circuits of cable (six lengths). Scope included performing 10 kV jacket integrity test, completion of 12 TE (Tyco) OHVT-145 terminations and witness 240 kV DC Hi-Pot test upon completion of the project.



Two crews prepping cable for Tyco OHVT-145 terminations

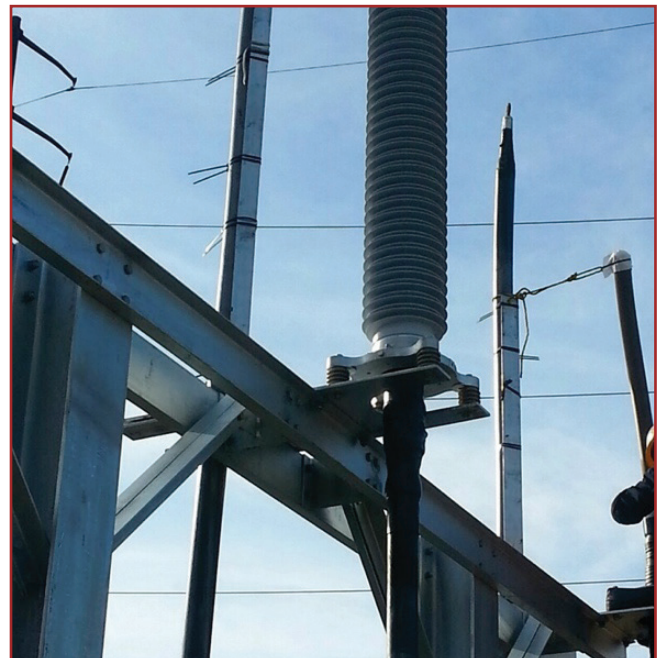

Newly installed Tyco OHVT-145 termination