

## AVIAN Cover Installation Guide

### Vise Top and/or Tie Top pin insulators on Double Crossarm

To install Hendrix Vise Top and/or Tie Top Avian cover on a double crossarm, the cover will require cutting in the field using a snip type cutter. Three different cuts of the center piece will be required to cover a pin-to-pin distance from 10" to 21". These cuts are defined as follow:

Cut A



Cut ~ 1.2" from outer edge  
Cut hot stickable loop

Cut B



Cut ~ 5.5" from outer edge

Cut C



Cut ~ 7" from outer edge



View of Cut A



View of Cut B




View of Cut C


	<b>Pin-to-Pin distance ( inch)</b>		
<b>Cut Type</b>	<b><u>10" to 15"</u></b>	<b><u>16 &amp; 17"</u></b>	<b><u>18" to 21"</u></b>
A		Install first	Install first
B	Install first		Install second
C	Install second	Install second	



10"-15" pin-to-pin: 15" showing

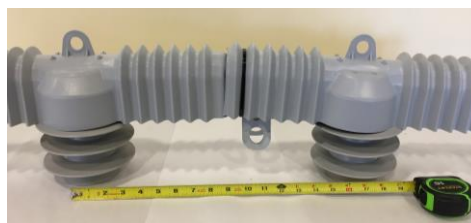

16" & 17" pin-to-pin: 17" showing

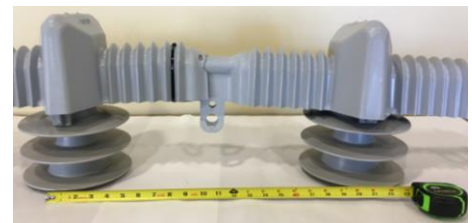

18"-21" pin-to-pin: 21" showing

For a given pin-to-pin distance, install the first cut as instructed in the table above then install and overlapp the second cut. Add an outdoor rated zip tie ¼" wide for extra security.