

# S8-800 Vertical Secondary Spacer

## B-200A, B200 Service Bails

### Description


The S8-800 is a “between poles” vertical secondary spacer which is used to separate bare or covered secondary conductors on vertical secondary circuits, mid-span service taps, and open wire service drops. The spacers are molded using proprietary, gray, high density polyethylene.

### Benefits

- Economical
- Easy to Install
- Neat appearance
- Trouble-free, non-shattering

### Application

The S8-800 spacer is especially useful on long secondary spans with bare conductors. They will accommodate bare or covered conductors having overall diameters as shown in the table below. Holes are provided in the spacers to permit the use of tie wires to secure the conductors to the spacer. Single and double service bails are used when making mid-span service taps. For single mid-span taps, specify the B-200A Single Bail. For double mid-span taps, specify the B200 Double Service Bail (one pair of bails). One B-200A and one B200 **cannot** be used together to make a double mid-span tap.

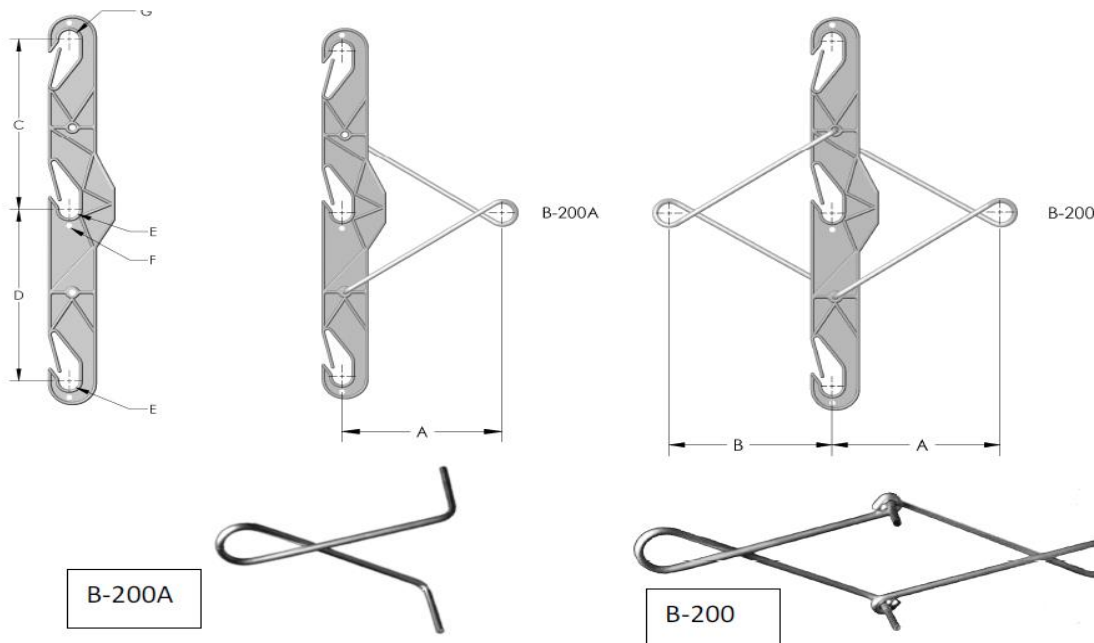

| Catalog Number | Dimensions (inches) |       |   |   |       |      |       | Overall |       | Weight (Lbs) | Material |
|----------------|---------------------|-------|---|---|-------|------|-------|---------|-------|--------------|----------|
|                | A                   | B     | C | D | E     | F    | G     | Height  | Width |              |          |
| S8-800         | -                   | -     | 8 | 8 | 0.800 | 0.25 | 0.800 | 18-1/4  | 2-3/4 | 0.42         | HDPE     |
| B-200A         | 5-3/8               | -     | - | - | -     | -    | -     | -       | -     | 0.10         | Aluminum |
| B200           | 5-3/8               | 5-3/8 | - | - | -     | -    | -     | -       | -     | 0.20         | Aluminum |