


Kerite Cable Services Project Profile

Project	Rochelle to Whittier 138kV Underground Transmission Cable
Client	Duke Energy
Location	Cincinnati, OH
Cable Design	138 kV, 2000 kcmil CU
Length	6,600 Circuit feet
Subcontractor(s)	Anderson & Wood Construction Wigro Construction
Scope	Prime Contractor for underground transmission project protruding through Martin Luther King Jr Blvd. Cincinnati, OH. Project included 6,600' of concrete encased duct bank, pull cable through ducts & install 15- G&W PMJ 140 Cold Shrink Splices & 6- G&W PAT140 Terminations.



Complete G&W PMJ 140 Cold Shrink Splices

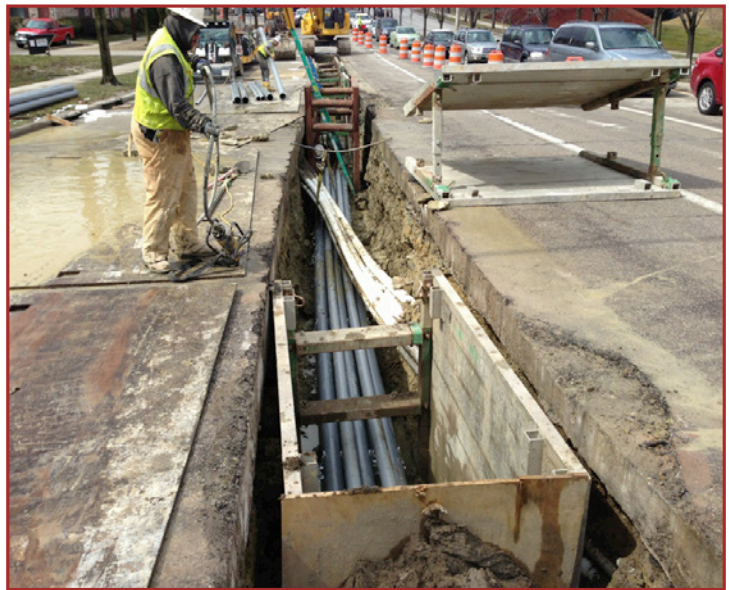

Construction of concrete encased ducts on Martin Luther King Jr. Blvd.