


Kerite Cable Services Project Profile

Project	Wescosville 138kV Termination Replacement
Client	PP&L Electrical Utility Corp.
Location	Wescosville, Pennsylvania
Cable Design	138kV, 1500kcmil Cu – High Voltage Cable
Length	No cable was provided
Subcontractors(s)	Anderson & Wood
Scope	Replaced a single termination (originally installed by others) which was found to have hot spots. PPL provided all materials needed to make the repair.



Termination removed and cable exposed and ready to be re-prepped so termination can be replaced.

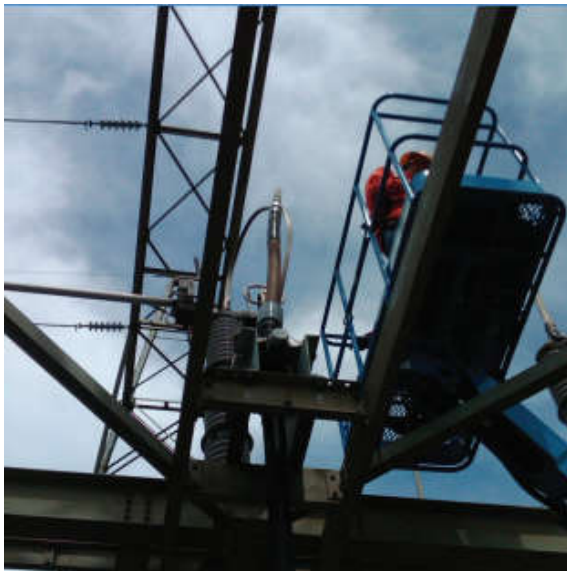

Score in insulation caused by others. Score was a potential cause of hot spots observed in the terminations. KCS technicians sanded out the score and rebuilt the terminations.