


TAP04CUSTR

Specification Sheet

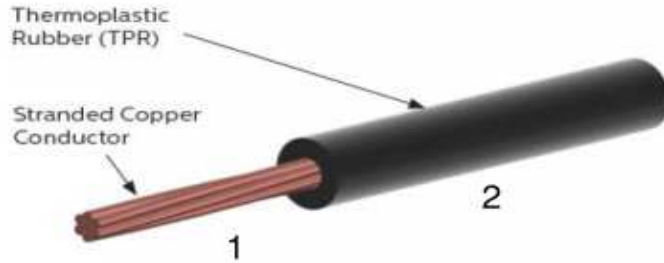

TAP WIRE

#4 AWG SOFT DRAWN COPPER CONDUCTOR (21mm²) 105° C BLACK

CONSTRUCTION:

- 1 #4 AWG (21mm²) 7 Strand Regular Round Soft Drawn Copper Conductor
- 2 0.150" (3.810 mm) Black Thermoplastic Rubber Elastomer

DIAMETERS:

- 1 0.232" (5.893 mm) Nom.
- 2 0.532" (13.513 mm) Nom.

CABLE DATA:

1	Cable Weight:	214 lb/ 1000 ft	(319 kg/km)
2	Conductor Weight:	129 lb/ 1000 ft	(192 kg/km)
3	Conductor Operating Temperature:	105° C	
4	D.C. Resistance @ 20°C:	0.253 ohms/1000 ft.	(0.8301 ohms/km)
5	Normal Ampacity:	209 Amps *	
6	Emergency Ampacity:	226 Amps **	

*105°C Conductor, 25°C Ambient, 2 ft/sec. (0.6096 m/s) Wind, Sun

**120°C Conductor, 25°C Ambient, 2 ft/sec. Wind, Sun

Marmon Utility, LLC
53 Old Wilton Road
Milford, NH 03055



603.249.1298
ACSSupport@Hendrix-wc.com
www.marmonutility.com