


TAP10CUSTR

Specification Sheet

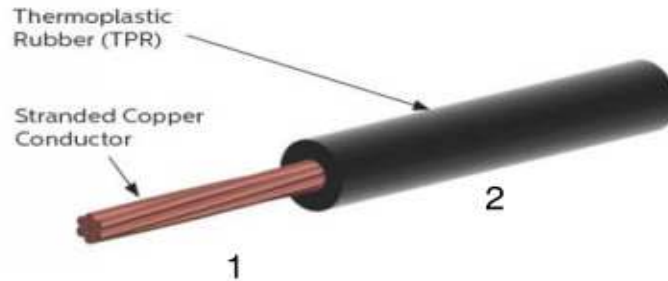

TAP WIRE

1/0 AWG SOFT DRAWN COPPER CONDUCTOR (54mm²) 105° C BLACK

CONSTRUCTION:

- 1 1/0 AWG (54mm²) 19 Strand Compressed Round Soft Drawn Copper Conductor
- 2 0.150" (3.810 mm) Black Thermoplastic Rubber Elastomer

DIAMETERS:

- 1 0.362" (9.195 mm) Nom.
- 2 0.662" (16.815 mm) Nom.

CABLE DATA:

1	Cable Weight:	428 lb/ 1000 ft	(637 kg/km)
2	Conductor Weight:	326 lb/ 1000 ft	(486 kg/km)
3	Conductor Operating Temperature:	105° C	
4	D.C. Resistance @ 20°C:	0.100 ohms/1000 ft.	(0.3281 ohms/km)
5	Normal Ampacity:	372 Amps *	
6	Emergency Ampacity:	404 Amps **	

*105°C Conductor, 25°C Ambient, 2 ft/sec. (0.6096 m/s) Wind, Sun

**120°C Conductor, 25°C Ambient, 2 ft/sec. Wind, Sun

Marmon Utility, LLC
53 Old Wilton Road
Milford, NH 03055



603.249.1298
ACSSupport@Hendrix-wc.com
www.marmonutility.com