



## HPI-55-5

Hendrix Tie Top Insulators are molded from a proprietary blend of gray, track and UV resistant, high density polyethylene. They are more durable and reliable than traditional wet-process porcelain insulators. They are also lighter, safer and easier to handle.


The HPI-55-5 is designed with standard ANSI neck and 1-1&3/8" thread size. It is a direct replacement for medium-voltage porcelain F-neck insulators and recommended for all conductor types, bare or covered.



- Exceeds ANSI electrical and mechanical requirements
- Resistant to impact damage, breakage and vandalism
- Designed for use with all Tie Products
- Made in USA

## PRODUCT DATA

Characteristic	ANSI C29.5 Class 55-5	HPI-55-5-01/02
<b>DIMENSIONS</b>		
Neck designation	F	F
Leakage distance (in)	12	14.2/14.9
Dry-arc distance (in)	6.25	7.2
<sup>[1]</sup> Pin-hole diameter (in)	1	(1)/(1-3/8)
<b>MECHANICAL VALUES</b>		
Cantilever strength (lbs)	3000	>3000
<b><sup>[2]</sup>ELECTRICAL VALUES</b>		
Typical application (kV)		25
Flashover voltage, 60 Hz Dry (kV)	80	86
Flashover voltage, 60 Hz Wet (kV)	45	58
Impulse Flashover – Positive (kV)	130	137
Impulse Flashover – Negative (kV)	150	197
Low frequency Puncture (kV)	115	215
<b>OTHER</b>		
Max. Conductor Diameter (in)		1.75
Part Weight (lbs)		(1.4)/(1.3)
<sup>[3]</sup> Max Continuous Conductor Temp (°C)		120

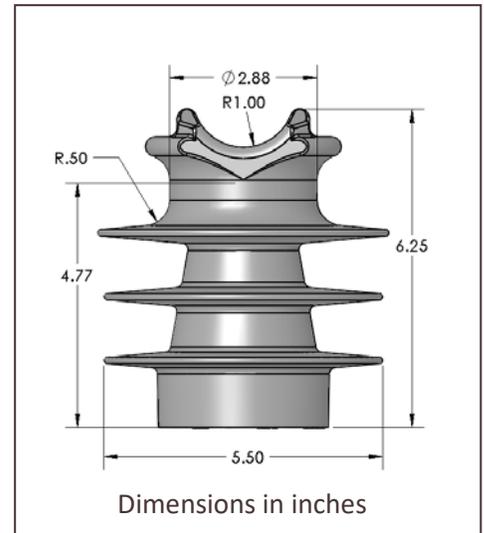

### Notes:

- [1] Other pin-hole diameters and thread configurations are available  
 [2] Values from test samples with 1" pin  
 [3] High temperature (200°C) model is available